




Juxing Purification Technology (Guangdong) Co., Ltd.

Comprehensive Solution Supplier for
Medical Doors & Special Doors

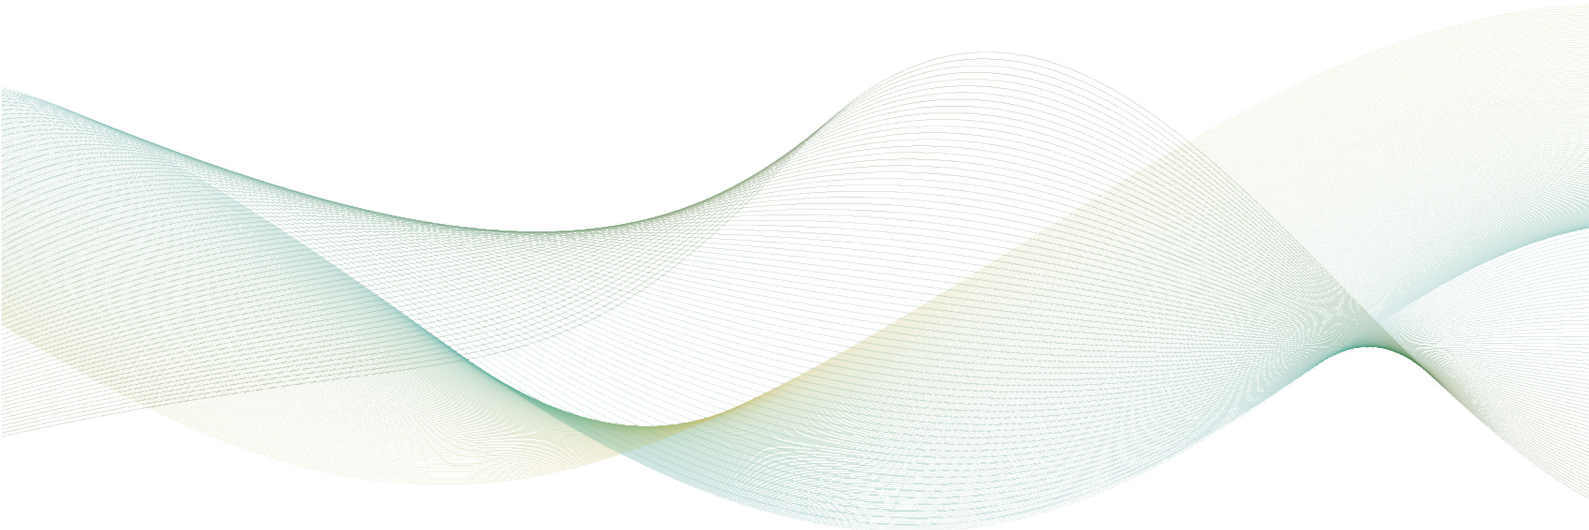

Juxing Purification Technology (Guangdong) Co., Ltd.

Address (Guangdong): No.189 Xianjiang Road, Dalang Town, Dongguan City
Address (Sichuan): No.820 Gangdong 2nd Road, North Area of Modern
Industrial Port, Pidu District, Chengdu City
Tel: 0769-87699062
Fax: 0769-87699062
Website: <https://juxingcleanroom.com>
E-mail: snowlotuszhou1688@gmail.com
WhatsApp: +86 152 1778 9793

ABOUT US

WHO WE ARE

Juxing Purification Technology (Guangdong) Co., Ltd. is a state-recognized National High-Tech Enterprise, founded in 2008, with deep expertise in integrated cleanroom and medical purification solutions. We own professional manufacturing bases in Dongguan, Guangdong and Chengdu, Sichuan, providing one-stop, factory-direct products and services to global clients

Our projects cover more than 500 hospitals, laboratories and clean manufacturing facilities worldwide, including top university-affiliated hospitals and leading electronics, pharmaceutical, and consumer brands in China.



OUR PRODUCTS & SOLUTIONS

1. Operating Room Integrated Solutions

- Modular operating rooms (electrolytic steel plate, keelfree, quickinstall, glass type)
- Laminar flow ceilings, power socket box, information panels, scrub sinks, and complete OR fittings

2. Medical Doors & Special Doors

- Automatic / manual airtight doors, radiationproof doors, ICU glass doors, ward doors, biosafety doors, PVC highspeed rollup doors

3. Cleanroom Integrated Solutions

- FFU, HEPA/ULPA filters, pass boxes, air showers, cargo showers, clean benches, air outlets, air cleaning screens
- ISO Class 1-9 cleanroom systems for pharmaceutical, electronics, food and precision industries

4. Medical & Laboratory Furniture

- Stainless steel / acrylic scrub sinks, medical cabinets, nurse stations, treatment cabinets, lockers
- Laboratory benches, hospital furniture and stainless steel auxiliary equipment

All products support full customization in size, color and specification. FOB Shenzhen price available.

CERTIFICATIONS & CREDENTIALS

- ⊙ Enterprise Status: National High-Tech Enterprise
- ⊙ Credit Rating: AAA Enterprise Credit Rating
- ⊙ Qualifications: Foreign Trade Operator License, Class II Medical Device License
- ⊙ Intellectual Property: 12 Utility Model Patents + 16 Software Copyrights
- ⊙ Honors: Outstanding Supplier, Guangdong Contract-Observing & Credit-Worthy Enterprise



CONTENTS

MEDICAL AIRTIGHT AUTOMATIC DOOR.....	05
MEDICAL AIRTIGHT AUTOMATIC DOOR (EMBEDDED).....	07
MEDICAL AIRTIGHT AUTOMATIC DOOR (EUROPEAN STYLE)	09
MEDICAL AIRTIGHT AUTOMATIC DOOR (DUAL MOTOR)	11
FOLDING AUTOMATIC DOOR	13
ICU GLASS AUTOMATIC DOOR	15
HORIZONTAL AUTOMATIC DOOR	17
MAGNETIC LEVITATION AIRTIGHT AUTOMATIC DOOR.....	19
MANUAL AIRTIGHT DOOR (SINGLE OPENING)	21
MANUAL AIRTIGHT DOOR (DOUBLE OPENING).....	23
MANUAL AIRTIGHT DOOR (UNEQUAL DOUBLE)	25
STEEL DOOR.....	27
WARD DOOR.....	29
FREE DOOR.....	31

IMPACT-RESISTANT FREE DOOR.....	33
SCHOOL STEEL DOOR.....	35
CLEAN STEEL DOOR (MACHINE-MADE PANEL)	37
CLEAN STEEL DOOR (HAND-MADE PANEL)	39
CLEAN SAFETY DOOR.....	41
RADIATION SHIELDING AIRTIGHT AUTOMATIC DOOR.....	43
HEAVY-DUTY RADIATION SHIELDING AUTOMATIC DOOR	45
RADIATION SHIELDING MANUAL AIRTIGHT DOOR.....	47
HEAVY-DUTY RADIATION SHIELDING MANUAL DOOR	49
BIOSAFETY AIRTIGHT DOOR	51
PVC FAST ROLLING SHUTTER DOOR.....	53
OTHER STRUCTURE DIAGRAMS	55
STANDARD COLOR CHART.....	56
Our Partners	57

MEDICAL AIRTIGHT AUTOMATIC DOOR (EMBEDDED)


Product Features

- ⦿ Recessed driver, track and door leaf integrate seamlessly with walls for a clean, elegant look
- ⦿ Imported high-performance driver & microcomputer multi-function digital control system
- ⦿ Excellent airtightness for dust-proof, temperature & humidity control in clean areas
- ⦿ Double-layer flat glass observation window for clear interior monitoring
- ⦿ Safety light beam prevents pinching during automatic closing
- ⦿ Automatic rebound upon obstruction for maximum safety

Technical Parameters

Door Leaf Weight	Max. 200kg (Single), 190kg×2 (Double)
Opening Width	Single: 1400–4200mm; Double: 2300–4200mm
Opening/Closing Speed	Adjustable
Hold Open Time	0.5–49.5s (Adj.)
Manual Force	<5kg
Power Supply	AC 170–264V, 50/60Hz
Max. Power	145W
Operating Environment	-20°C ~ +50°C , 30%–85% RH

Structure

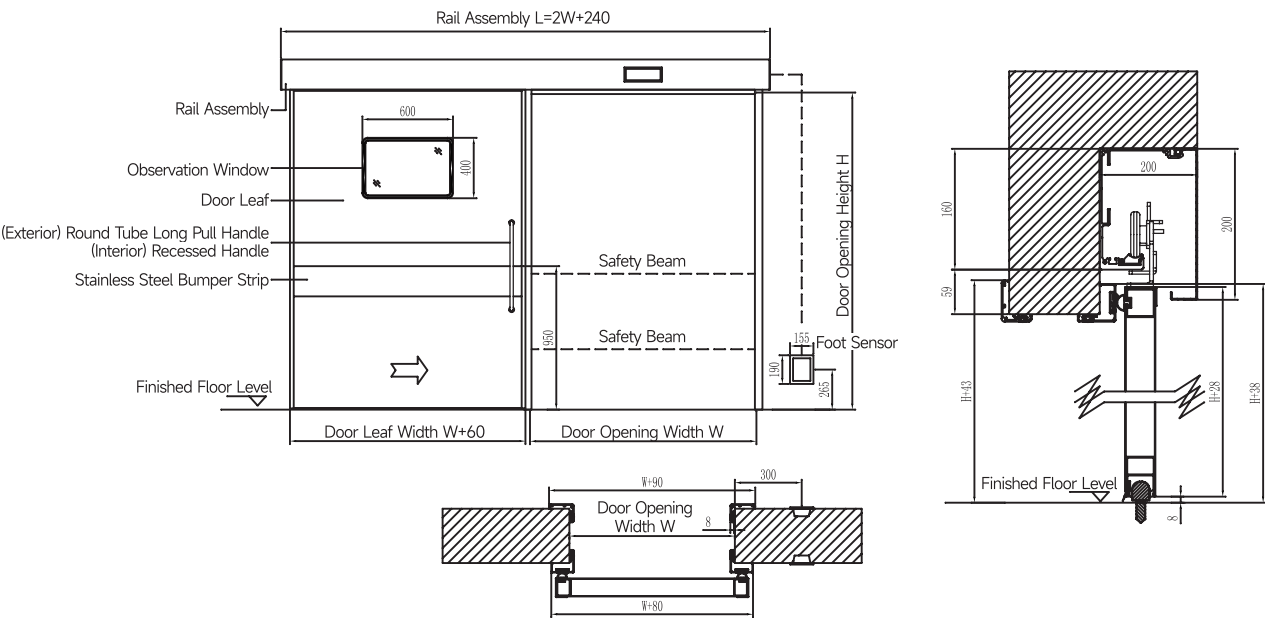

MEDICAL AIRTIGHT AUTOMATIC DOOR (EUROPEAN STYLE)


Product Features

- Overhead-mounted driver, track and door leaf for easy, fast installation
- Imported high-performance driver & microcomputer multi-function digital control system
- Powder-coated steel door leaf with high-strength honeycomb core, sturdy, flat & elegant
- Excellent airtightness for dust-proof, temperature & humidity control in clean areas
- Foot control or non-contact sensor opening for hygiene & convenience
- Safety anti-pinch system & automatic rebound for maximum safety

Technical Parameters

Door Leaf Weight	Max. 200kg (Single), 190kg×2 (Double)	Hold Open Time	0.5-49.5s (Adj.)
Door Width	Single: 600-1500mm; Double: 800-1300mm	Manual Force	<5kg
Opening Width	Single: 1400-4200mm; Double: 2300-4200mm	Power Supply	AC 170-264V, 50/60Hz
Opening Speed	300-700mm/s (Adj.)	Max. Power	145W
Closing Speed	100-600mm/s (Adj.)	Operating Environment	-20°C ~ +50°C , 30%-85% RH

Structure

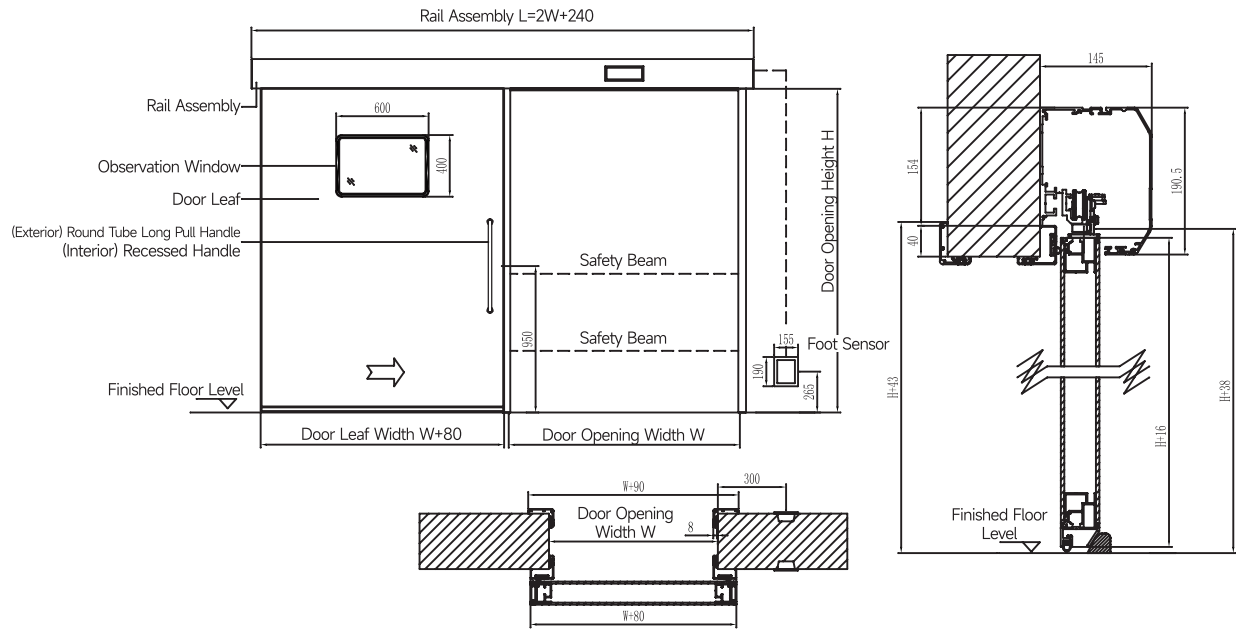

MEDICAL AIRTIGHT AUTOMATIC DOOR (DUAL MOTOR)


Product Features

- Overhead-mounted driver, track and door leaf for easy, fast installation
- Imported dual-motor driver & microcomputer multi-function digital control system
- Powder-coated steel door leaf with high-strength honeycomb core, sturdy, flat & elegant
- Excellent airtightness for dust-proof, temperature & humidity control in clean areas
- Ergonomic handle for easy manual operation during power outage
- Foot control or non-contact sensor opening for hygiene & convenience
- Safety light beam prevents pinching during automatic closing
- Automatic rebound upon obstruction for maximum safety

Technical Parameters

Door Leaf Weight	Max. 200kg (Single), 190kg×2 (Double)	Hold Open Time	0.5–49.5s (Adj.)
Door Width	Single: 600–1500mm; Double: 800–1300mm	Manual Force	<5kg
Opening Width	Single: 1400–4200mm; Double: 2300–4200mm	Power Supply	AC 170–264V, 50/60Hz
Opening Speed	300–700mm/s (Adj.)	Max. Power	145W
Closing Speed	100–600mm/s (Adj.)	Operating Environment	-20°C ~ +50°C , 30%–85% RH

Structure

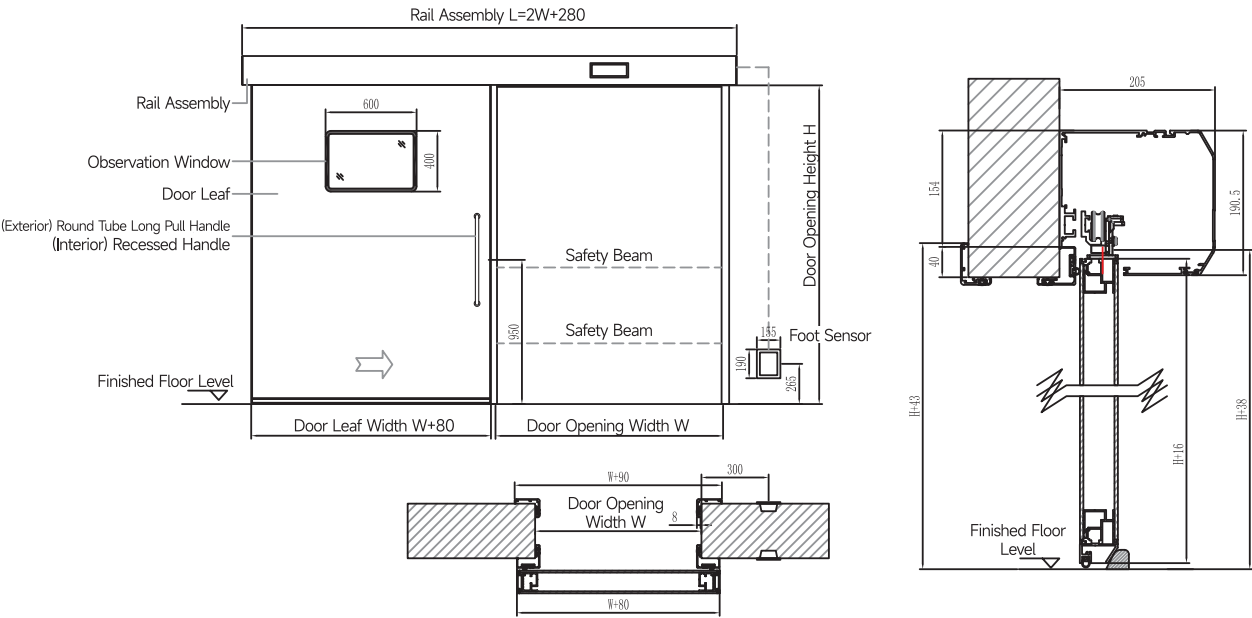



FOLDING AUTOMATIC DOOR


Product Features

- ⦿ Ideal for space-limited areas & special applications
- ⦿ Dual-system drive, seamless frame, anti-pinch & obstacle rebound
- ⦿ Large high-strength tempered glass door with aluminum/stainless steel frame
- ⦿ High-quality sealing strips for optimal airtightness
- ⦿ Multiple opening options: foot control, password, facial recognition, manual, microwave sensor
- ⦿ Special design ensures stable, smooth operation

Technical Parameters

Type	4-Leaf
Opening Width	800mm-2000mm
Door Height	2000mm-2200mm
Opening/Closing Angle	90° Adjustable
Hold Open Time	1s-20s (Adj.)
Max. Output Power	30W

Structure

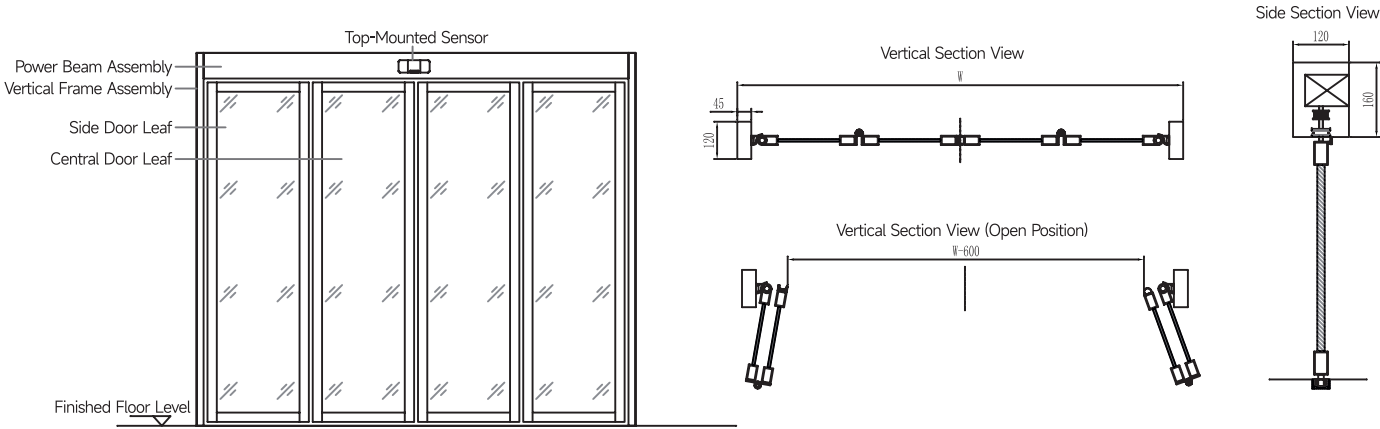


Product Features

- ⦿ Large high-strength tempered glass door with aluminum/stainless steel frame for clear patient observation
- ⦿ Excellent airtightness for dust-proof, temperature & humidity control in clean areas
- ⦿ Smooth operation, superior airtightness & sound insulation
- ⦿ Multiple opening options: foot control, password, facial recognition, manual control
- ⦿ Safety light beam prevents pinching during automatic closing

Technical Parameters

Opening Speed	300~700mm/s (Adj.)
Closing Speed	100~600mm/s (Adj.)
Power Supply	AC 170V~264V, 50/60Hz
Operating Environment	-20°C ~ +50°C , 30%~85% RH

Structure

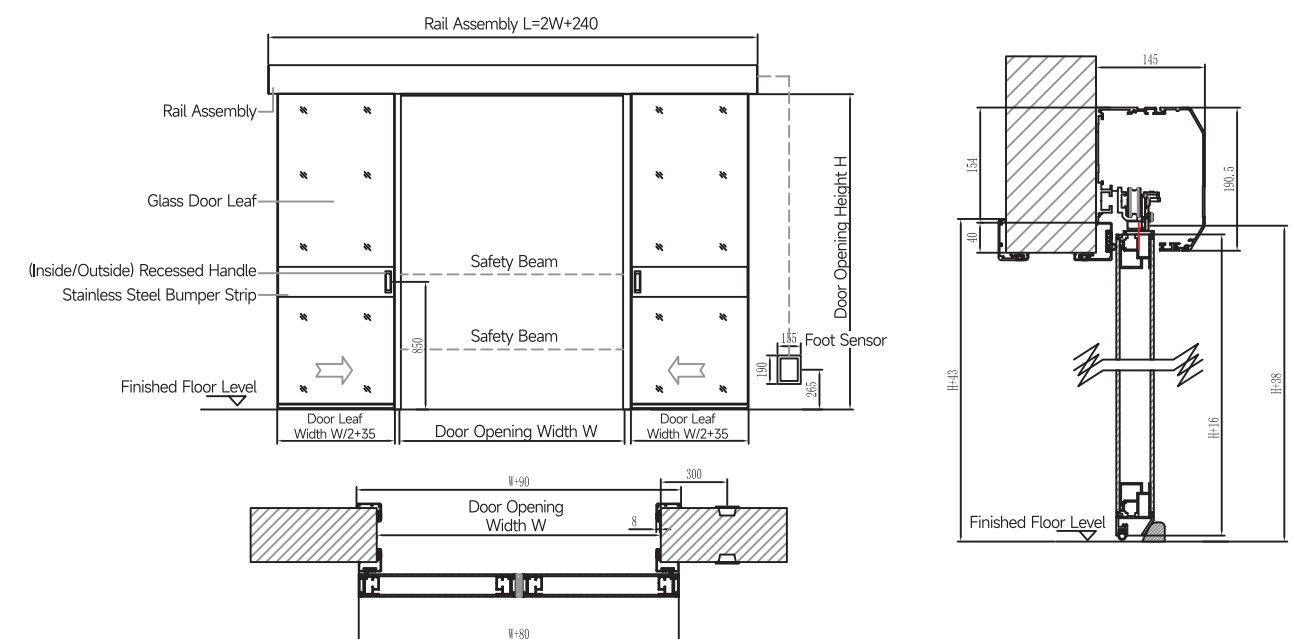

HORIZONTAL AUTOMATIC DOOR


Product Features

- ⦿ High-quality swing door operator for special applications
- ⦿ Microcomputer digital control system with adjustable opening/closing time & angle
- ⦿ Premium aluminum door frame with 45° mitered joint
- ⦿ Integrated sealing strip for excellent airtightness
- ⦿ Double-glass observation window for clear visibility
- ⦿ Multiple opening options: foot, password, facial recognition, hand control, microwave sensor

Technical Parameters

Opening Angle	60° -120° (Adj.)
Auto Opening/Closing Speed	2.5-6s (0° -90° , Adj.)
Hold Open Time	0s-30s (Adj.)
Power Supply	220V ±10%, 50-60Hz
Rated Power	45W
Standby Power	5W

Structure

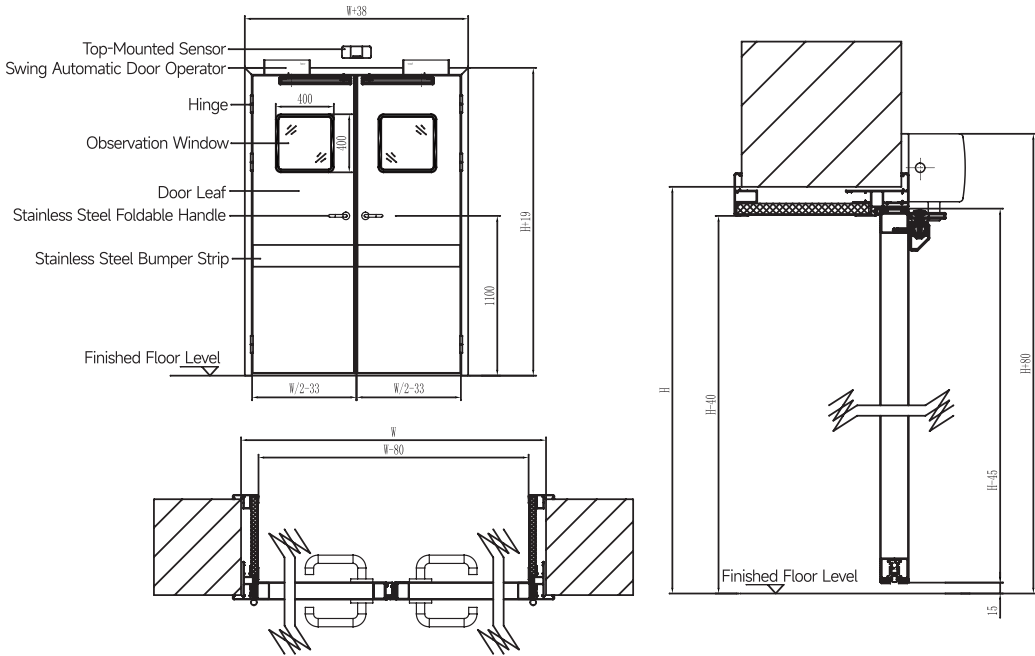

MAGNETIC LEVITATION AIRTIGHT AUTOMATIC DOOR


Product Features

- ⦿ Magnetic levitation drive for ultra-smooth, silent operation
- ⦿ Superior airtightness to maintain cleanroom environment & stable temperature/humidity
- ⦿ Special craftsmanship for stable performance, excellent airtightness & sound insulation
- ⦿ Double-glass observation window for clear visibility
- ⦿ Ergonomic handle for easy manual operation during power outage
- ⦿ Optional foot/non-contact sensor for hygienic hands-free access
- ⦿ Safety light curtain for anti-pinch protection

Technical Parameters

Door Leaf Weight	Single: 40-100kg; Double: 30-90kg per leaf
Opening Width	Single: >700mm; Double: >1300mm
Hold Open Time	Adjustable
Power Supply	AC 220V, 50Hz

Structure

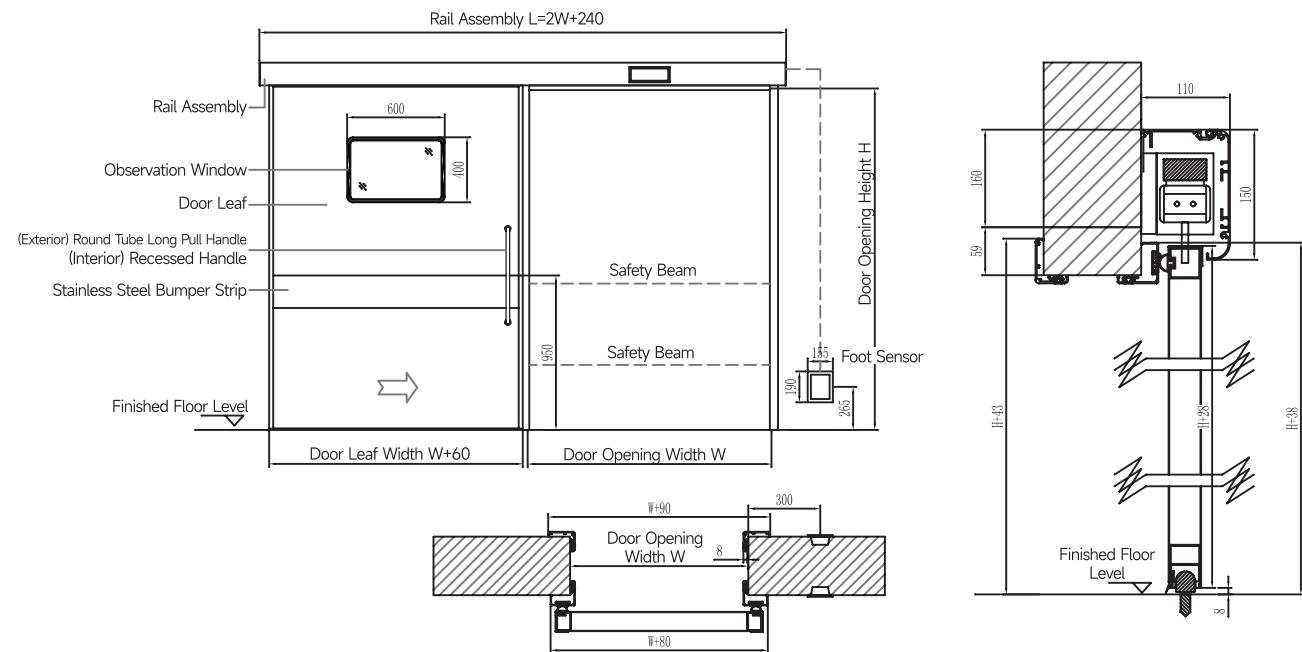

MANUAL AIRTIGHT DOOR (SINGLE OPENING)


Product Features

- ⦿ High-strength honeycomb-filled steel door panel
- ⦿ Premium aluminum door frame with sealing strip for reliable airtightness
- ⦿ Automatic bottom sealing strip for optimal airtight performance
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, access control
- ⦿ Ideal for wards, offices, operating rooms & auxiliary rooms
- ⦿ Exquisite craftsmanship for elegant appearance & reliable performance

Technical Parameters

Door Leaf Weight	Max. 150kg
Door Width	600-1000mm (Customizable)
Door Height	Standard 2100mm (Customizable)
Opening Angle	0° -170°

Structure

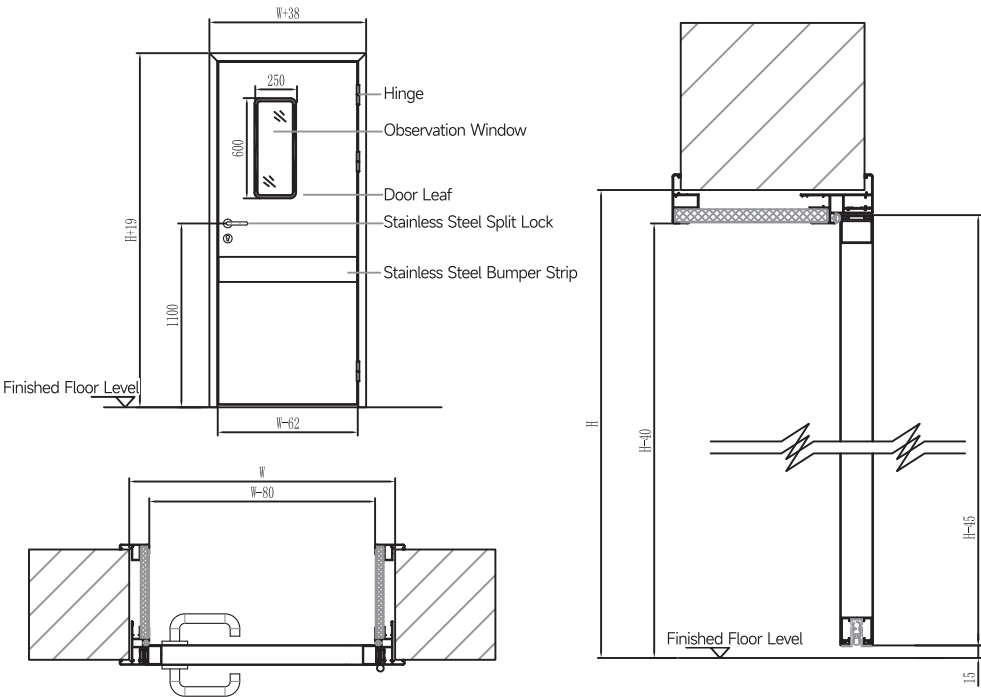



MANUAL AIRTIGHT DOOR (DOUBLE OPENING)


Product Features

- ⦿ High-strength honeycomb-filled steel door panel
- ⦿ Premium aluminum door frame with sealing strip for reliable airtightness
- ⦿ Automatic bottom sealing strip for optimal airtight performance
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, access control
- ⦿ Ideal for wards, offices, operating rooms & auxiliary rooms
- ⦿ Exquisite craftsmanship for elegant appearance & reliable performance

Technical Parameters

Door Leaf Weight	Max. 150kg
Door Width	Standard 1500mm (Customizable)
Door Height	Standard 2100mm (Customizable)
Opening Angle	0° -170°

Structure

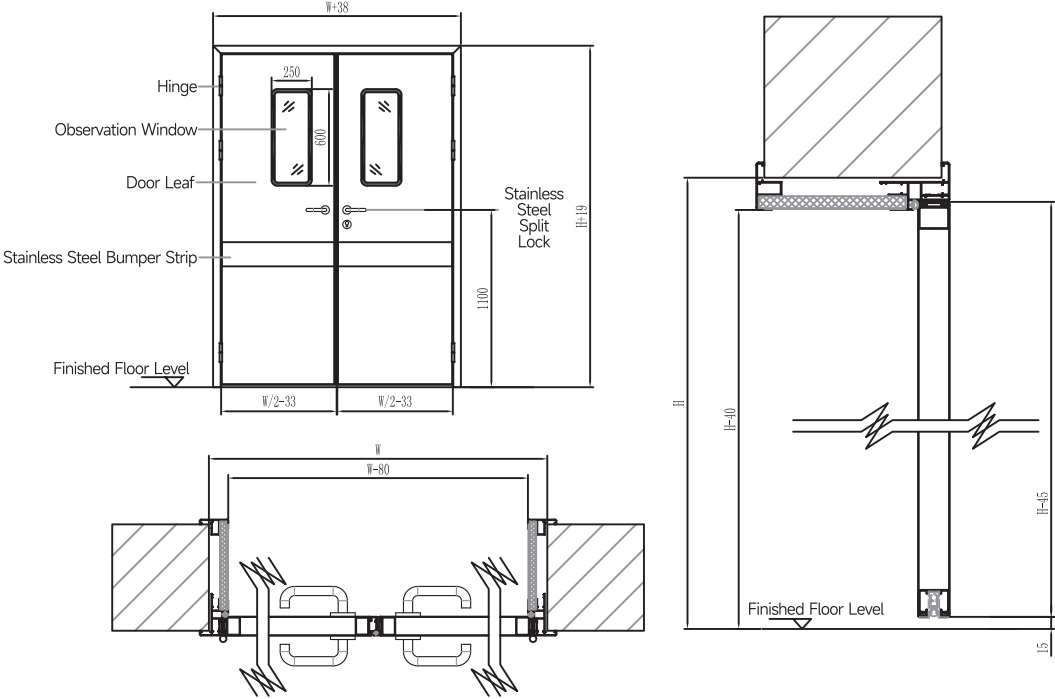



MANUAL AIRTIGHT DOOR (UNEQUAL DOUBLE)


Product Features

- ⦿ High-strength honeycomb-filled steel door panel
- ⦿ Premium aluminum door frame with sealing strip for reliable airtightness
- ⦿ Automatic bottom sealing strip for optimal airtight performance
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, access control
- ⦿ Ideal for wards, offices, operating rooms & auxiliary rooms
- ⦿ Exquisite craftsmanship for elegant appearance & reliable performance

Technical Parameters

Door Leaf Weight	Max. 150kg
Door Height	Standard 2100mm (Customizable)
Opening Angle	0° -170°

Structure

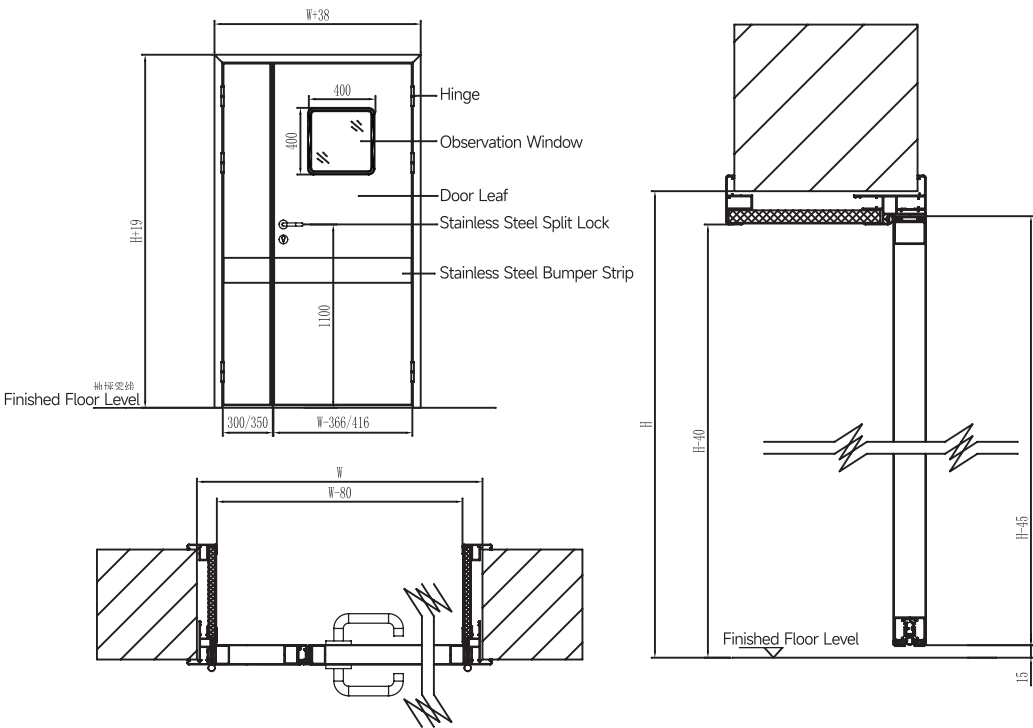

STEEL DOOR


Product Features

- ⦿ High-strength honeycomb-filled steel door panel, sturdy & sleek
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, sealing strip, access control
- ⦿ Ideal for wards, offices, operating rooms & auxiliary rooms

Technical Parameters

Frame Steel Thickness	1.5mm
Door Leaf Steel Thickness	0.8mm
Core Filling	High-strength paper honeycomb
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

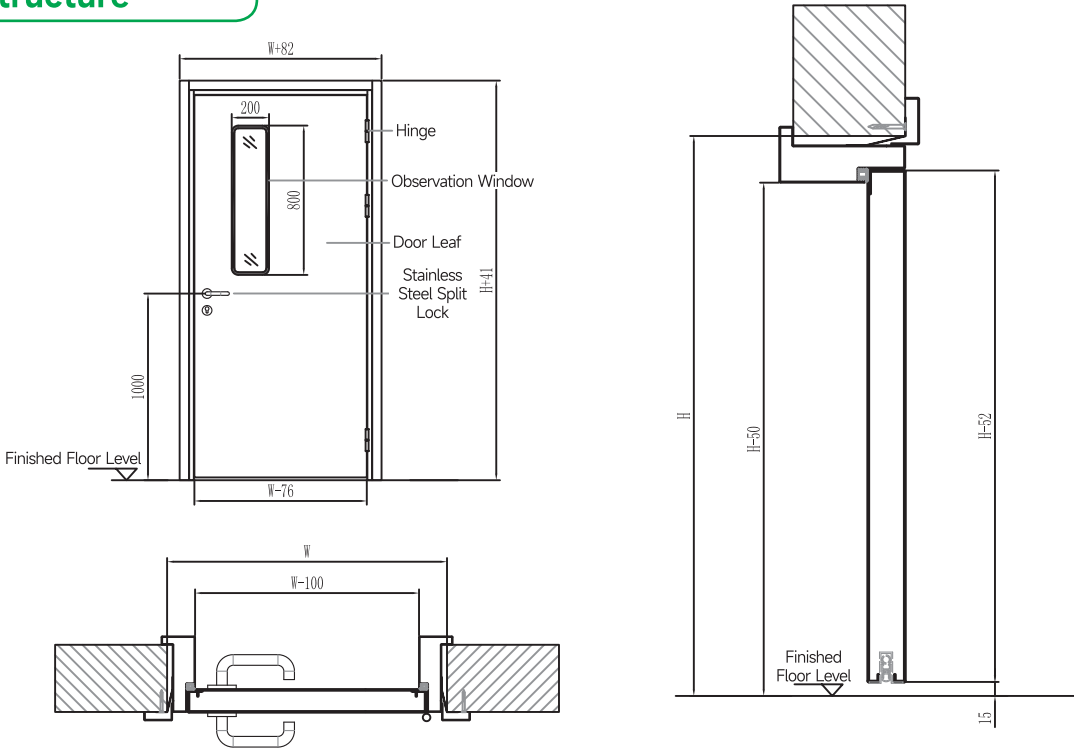



WARD DOOR


Product Features

- ⦿ High-strength honeycomb-filled steel door panel, sturdy & sleek
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, sealing strip, access control
- ⦿ Ideal for wards, offices, operating rooms & auxiliary rooms

Technical Parameters

Frame Steel Thickness	1.5mm
Door Leaf Steel Thickness	0.8mm
Core Filling	High-strength paper honeycomb (Optional)
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

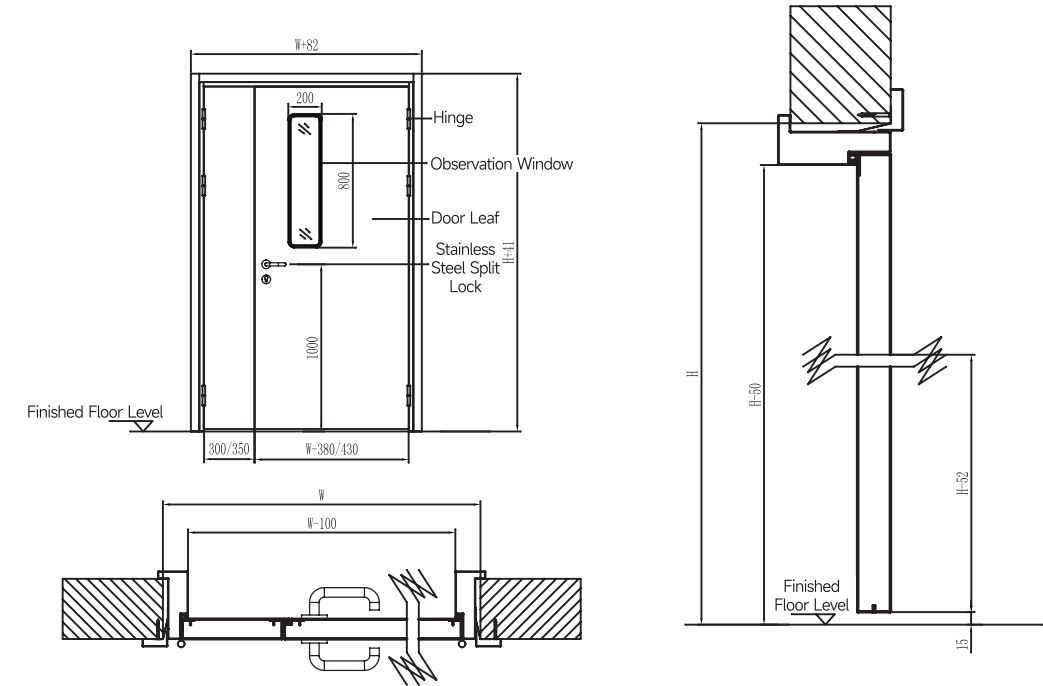

FREE DOOR


Product Features

- ⦿ High-strength honeycomb-filled steel door panel, sturdy & sleek
- ⦿ Premium stainless steel/steel door frame with sealing strip
- ⦿ Double-glass observation window for clear visibility
- ⦿ Bearing hinges for automatic closing
- ⦿ Ideal for pharmaceutical, electronics, hospital, laboratory, food & biotech cleanrooms

Technical Parameters

Frame Steel Thickness	1.2mm-1.5mm
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

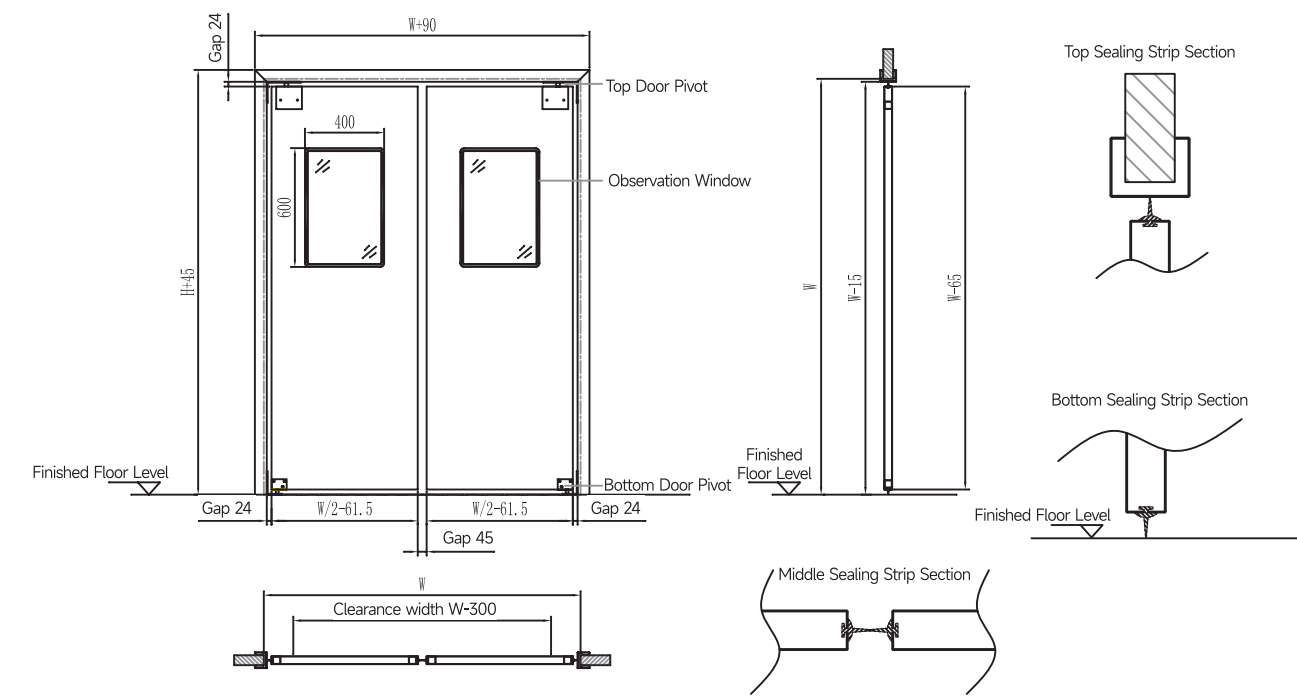

IMPACT-RESISTANT FREE DOOR


Product Features

- High-strength honeycomb-filled steel/stainless steel door panel, sturdy & durable
- Fully welded door frame with premium sealing strip
- Double-layer flat PC observation window for clear visibility
- Bearing hinges for automatic closing
- U-shaped high-strength PVC crash plates on both sides for long service life

Technical Parameters

Frame Steel Thickness	1.2mm-1.5mm
Door Leaf Steel Thickness	0.8mm-1.0mm
Core Filling	High-strength paper honeycomb (Optional)
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

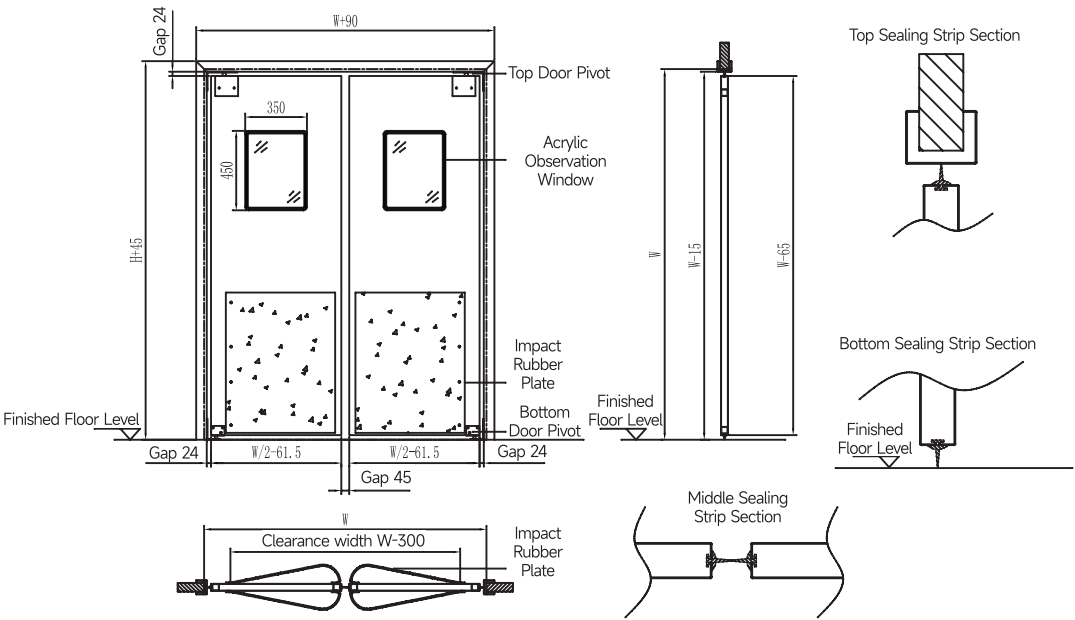

SCHOOL STEEL DOOR


Product Features

- High-strength honeycomb-filled steel door panel, sturdy & sleek
- Double-glass observation window for clear visibility
- Equipped with SUS304 stainless steel hinges, locks & hardware
- Custom accessories: door closer, door stop, floor spring, sealing strip, access control
- Ideal for classrooms, offices & other school interior spaces

Technical Parameters

Frame Steel Thickness	1.5mm
Door Leaf Steel Thickness	0.8mm
Core Filling	High-strength paper honeycomb (Optional)
Door Width	700-1600 (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

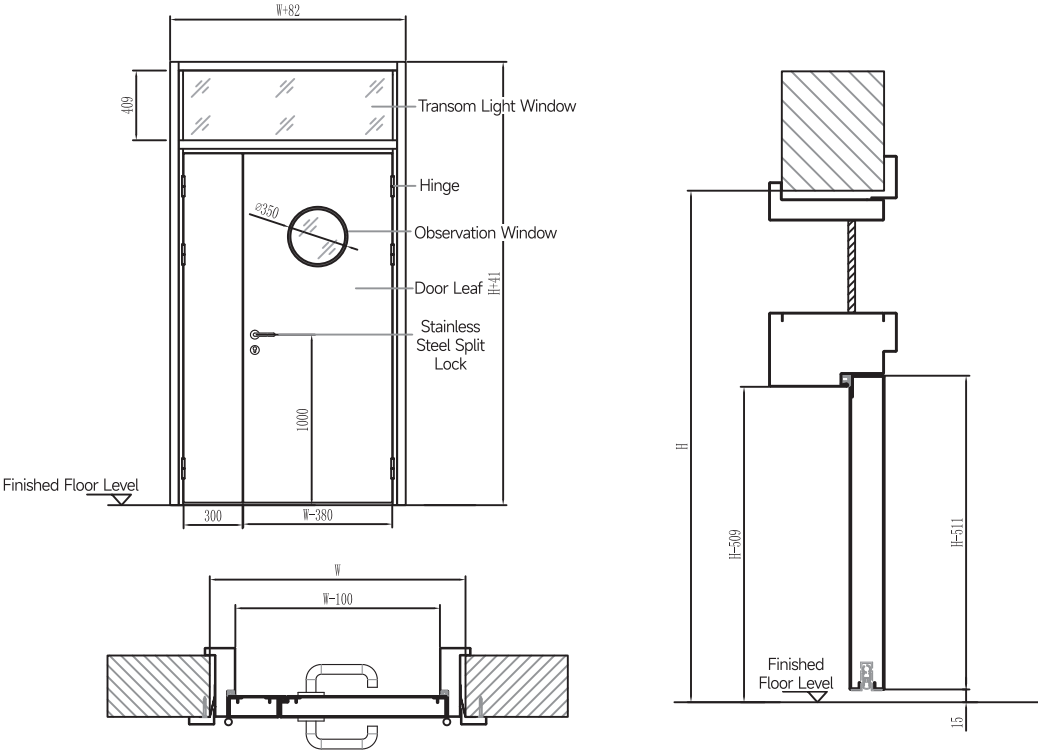

CLEAN STEEL DOOR (MACHINE-MADE PANEL)


Product Features

- ⦿ High-strength honeycomb-filled steel/stainless steel door panel, sturdy & durable
- ⦿ Automatic bottom sealing strip for optimal airtightness
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, access control
- ⦿ Ideal for pharmaceutical, electronics, hospital, laboratory, food & biotech cleanrooms

Technical Parameters

Frame Steel Thickness	1.2mm-1.5mm
Door Leaf Steel Thickness	0.8mm-1.0mm
Core Filling	High-strength paper honeycomb (Optional)
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

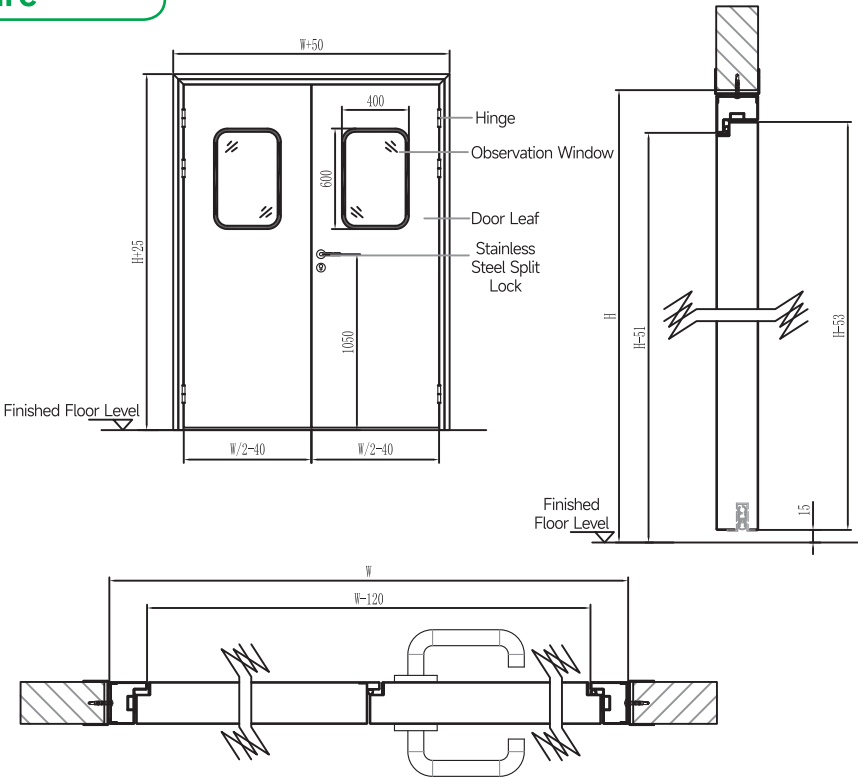

CLEAN STEEL DOOR (HAND-MADE PANEL)


Product Features

- ⦿ High-strength honeycomb-filled steel/stainless steel door panel, sturdy & durable
- ⦿ Automatic bottom sealing strip for optimal airtightness
- ⦿ Double-glass observation window for clear visibility
- ⦿ Equipped with SUS304 stainless steel hinges, locks & hardware
- ⦿ Custom accessories: door closer, door stop, floor spring, access control
- ⦿ Ideal for pharmaceutical, electronics, hospital, laboratory, food & biotech cleanrooms

Technical Parameters

Frame Steel Thickness	1.2mm-1.5mm
Door Leaf Steel Thickness	0.8mm-1.0mm
Core Filling	High-strength paper honeycomb (Optional)
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

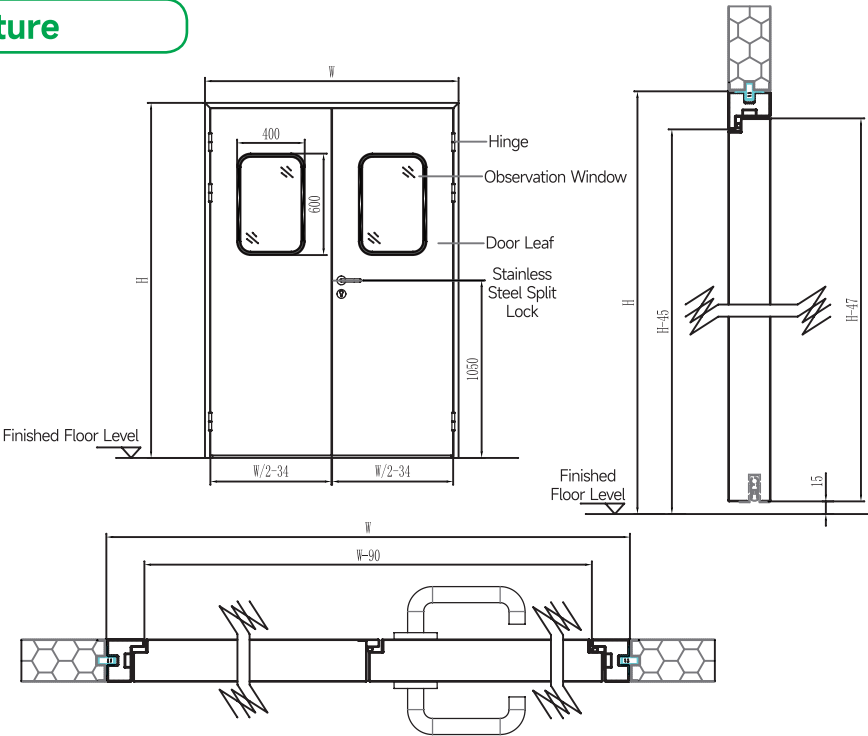

CLEAN SAFETY DOOR


Product Features

- ⦿ Large tempered glass door with steel frame edging
- ⦿ Fully welded stainless steel/steel frame with premium sealing strip
- ⦿ Automatic bottom sealing strip for optimal airtightness
- ⦿ Emergency exit design with push bar for safety compliance

Technical Parameters

Frame Steel Thickness	1.2mm-1.5mm
Door Leaf Steel Thickness	0.8mm-1.0mm
Core Filling	High-strength paper honeycomb (Optional)
Door Width	700-1600mm (Customizable)
Door Height	2000-2600mm (Customizable)

Structure

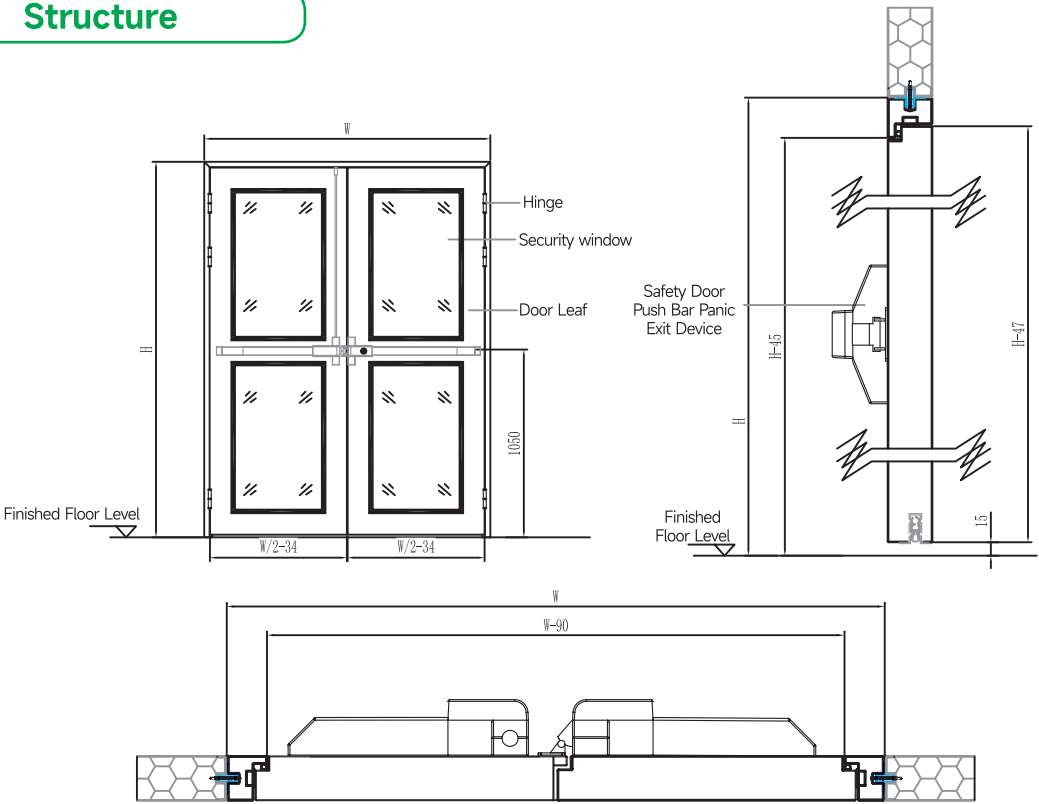

RADIATION SHIELDING AIRTIGHT AUTOMATIC DOOR


Product Features

- ⦿ Imported high-performance driver & microcomputer multi-function digital control system
- ⦿ Built-in 1-3mmPb lead sheet for effective X-ray/radiation shielding
- ⦿ Superior airtightness to maintain cleanroom environment & stable temperature/humidity
- ⦿ Ergonomic handle for easy manual operation during power outage
- ⦿ Automatic rebound upon obstruction for maximum safety
- ⦿ Optional lead glass window available

Technical Parameters

Door Leaf Weight	Single: Max. 180kg; Double: Max. 98kg per leaf
Opening Speed	300-700mm/s (Adj.)
Closing Speed	150-500mm/s (Adj.)
Hold Open Time	0.5-49.5s(Adj.)
Power Supply	AC 220V, 50Hz
Max. Output Power	180W
Operating Environment	-20℃ ~ +50℃ , 30%-85% RH

Structure

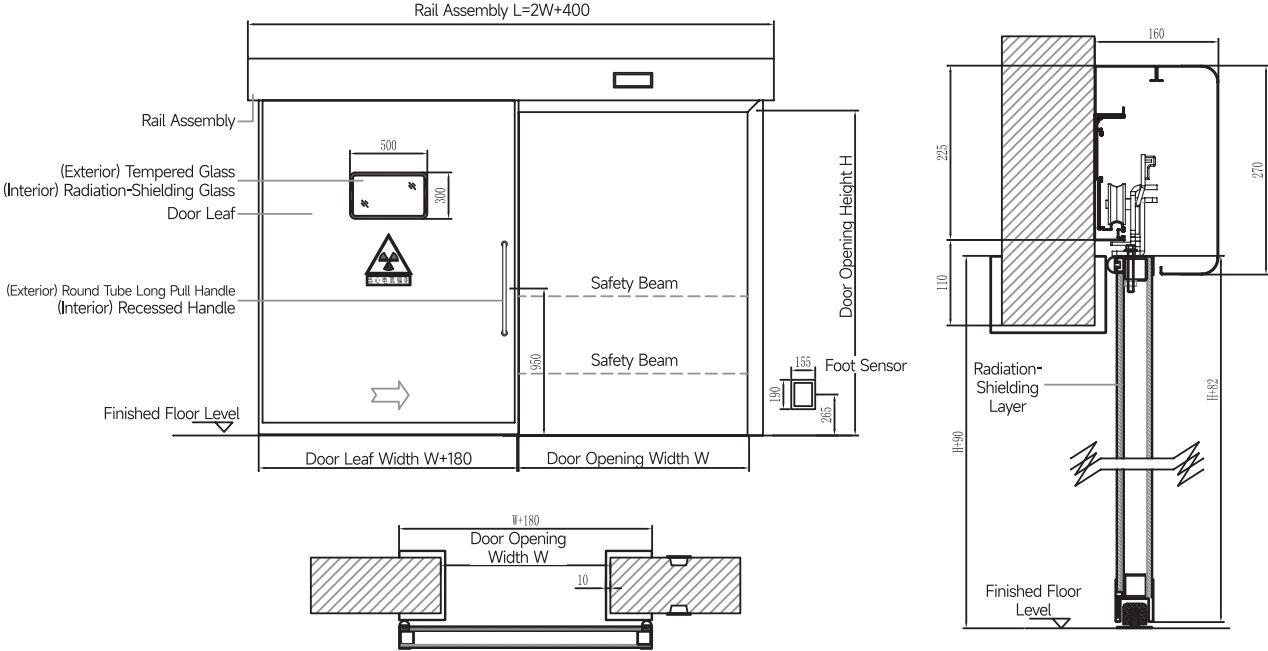

HEAVY-DUTY RADIATION SHIELDING AUTOMATIC DOOR


Product Features

- ⦿ Advanced heavy-duty driver & microcomputer multi-function digital control system
- ⦿ Built-in up to 3mmPb lead sheet for strong X-ray/radiation shielding
- ⦿ Premium 304 stainless steel/steel frame with smooth coating, elegant & durable
- ⦿ Safety light beam for anti-pinch & obstacle detection
- ⦿ Heavy-duty bottom rollers & stainless steel track for stable operation

Technical Parameters

Opening Speed	300-700mm/s (Adj.)
Closing Speed	150-500mm/s (Adj.)
Hold Open Time	0.5s-49.5s (Adj.)
Power Supply	220V, 50Hz
Max. Output Power	180W
Operating Environment	-20℃ ~ +50℃ , 30%-85% RH

Structure

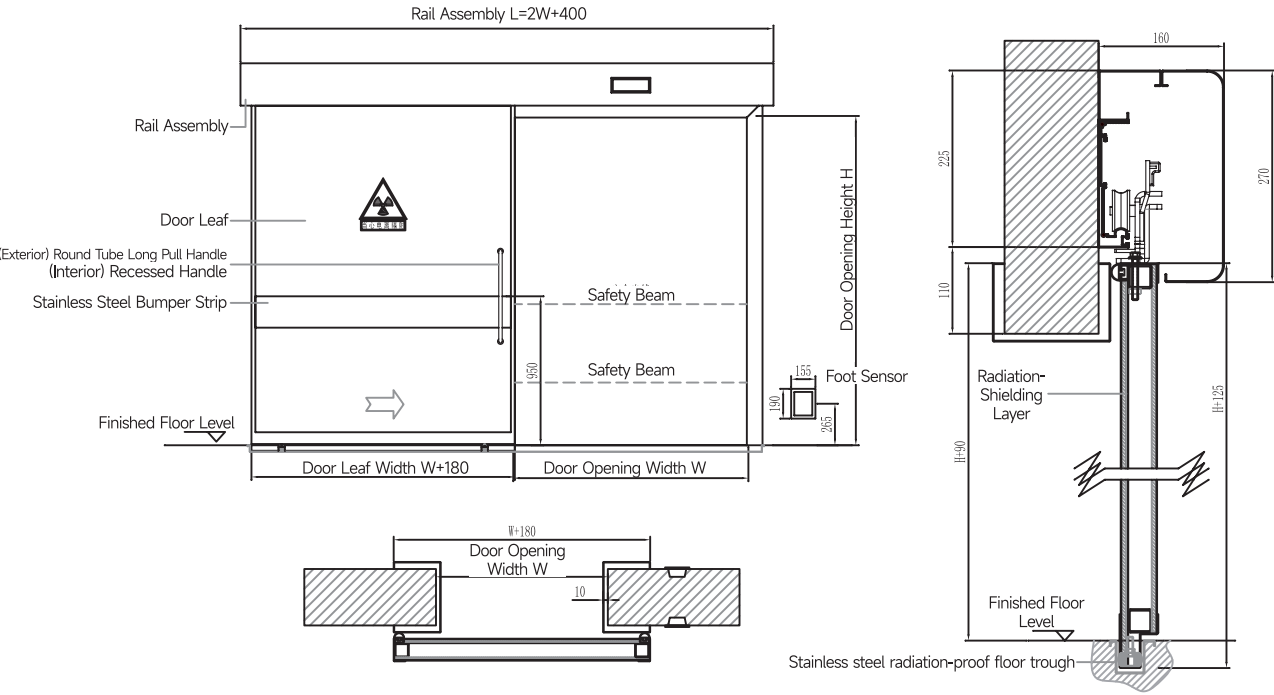

RADIATION SHIELDING MANUAL AIRTIGHT DOOR


Product Features

- Door leaf: powder-coated steel or SUS304 stainless steel
- Built-in 1-3mmPb lead sheet (Optional)
- Fitted with 1-3mmPb lead glass window (Optional)
- Equipped with SUS304 stainless steel hinges, locks & refined hardware

Technical Parameters

Max. Door Leaf Weight	185kg
Door Width	800mm-1100mm
Door Height	2000mm-2200mm
Opening Angle	0° -170°

Structure

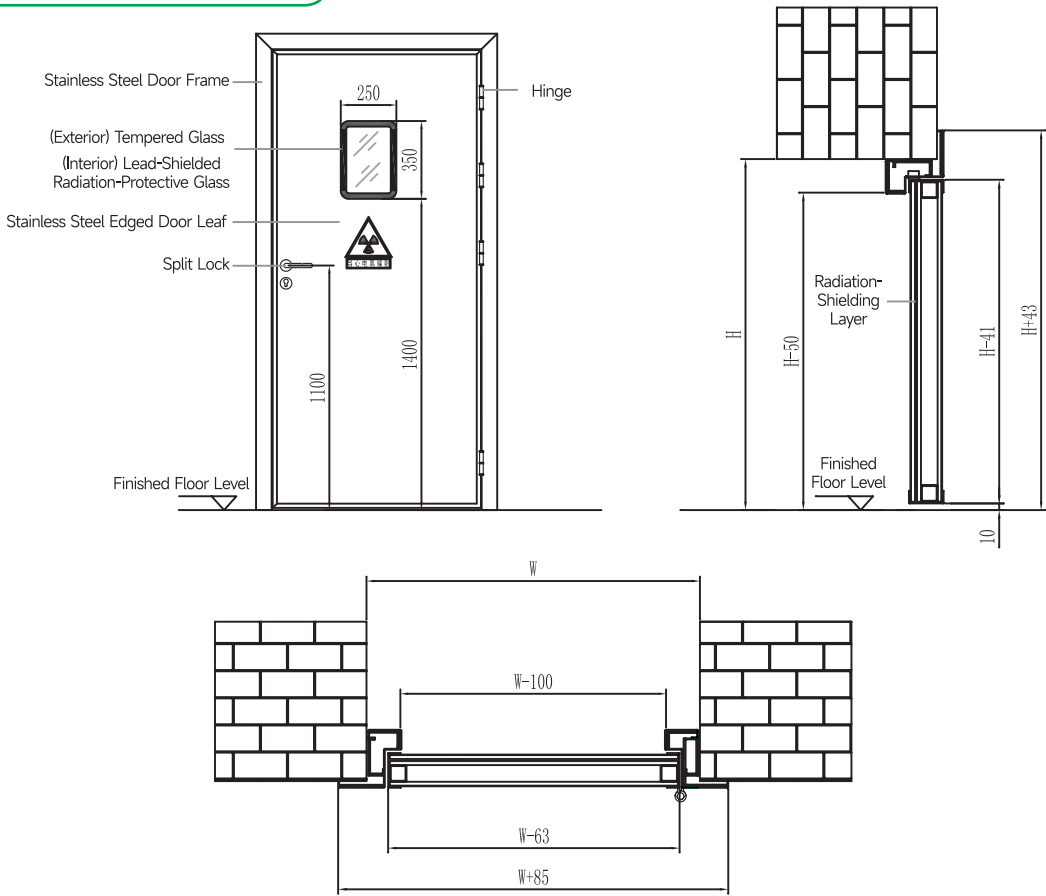

HEAVY-DUTY RADIATION SHIELDING MANUAL DOOR


Product Features

- High-quality powder-coated steel or SUS304 stainless steel door leaf
- Built-in up to 3mmPb lead sheet (Optional)
- Fully welded square door frame with embedded lead sheet
- Equipped with SUS304 stainless steel heavy-duty hinges, locks & hardware

Technical Parameters

Door Leaf Weight	>185kg
Door Width	800mm-1100mm
Door Height	2000mm-2200mm
Opening Angle	0° -170°

Structure

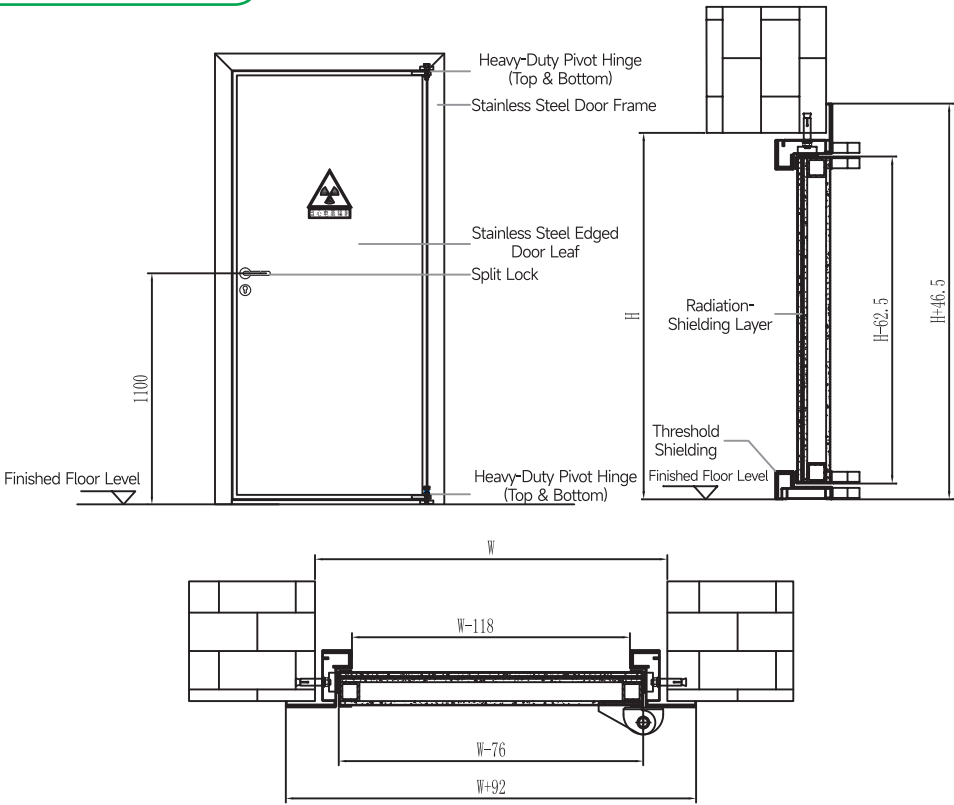

BIOSAFETY AIRTIGHT DOOR


Product Features

- ⦿ Imported high-density, durable sealing strips
- ⦿ Stainless steel framed observation window
- ⦿ Interlock function to prevent misoperation
- ⦿ Machine-kiss door frame design for easy installation
- ⦿ Concentric circular corner design ensures full airtightness

Technical Parameters

Power Supply	220V 50Hz	Inflation Pressure	1.5 kg/cm ²
Operating Temperature	- 30° C ~ +50° C	Inflation Time	< 5 s
Operating Humidity	< 90%	Deflation Time	< 5 s
Power Supply	220V 50Hz		

Structure

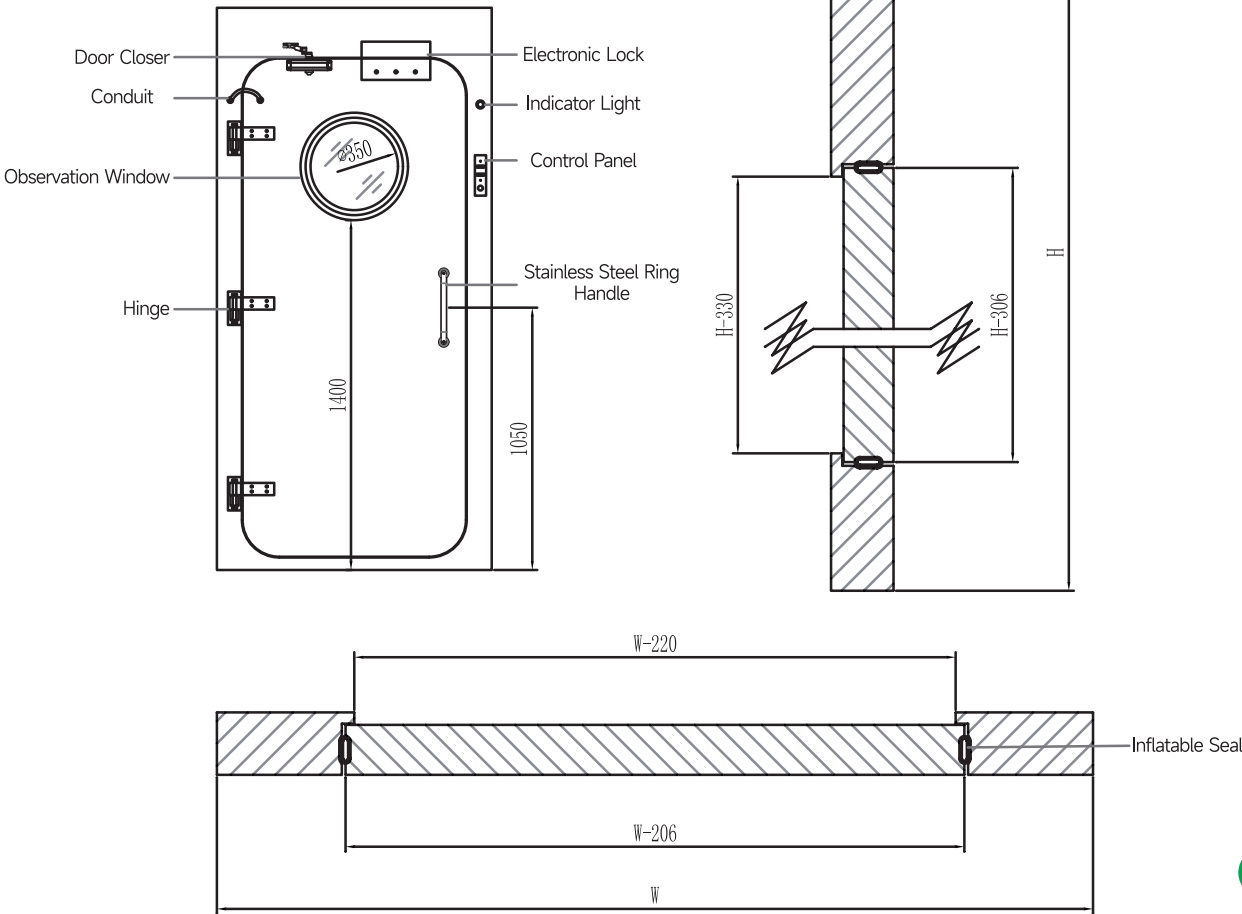



PVC FAST ROLLING SHUTTER DOOR


Product Features

- Adopts advanced driving device and multifunctional microcomputer digital control system.
- Safety sensors automatically detect obstacles above and below the door leaf, preventing pinching injuries or object trapping during automatic closing.
- Made of highgrade industrial polyester fiber base cloth with highstrength ecofriendly polyester fiber and doublesided PVC coating, available in multiple colors.
- Excellent wind resistance; aluminum alloy windresistant ribs are installed at curtain joints to enhance windproof performance.
- Specially designed bottom edge tightly fits uneven ground; builtin guide rail brushes provide dustproof and sealing effects.
- Supports radar induction & manual pushbutton control for quick and convenient operation.


Technical Parameters

Door Post Material Thickness	1.2mm	Closing Speed	0.6m~1.5m/s
Hood Material Thickness	1.0mm	Power	0.9kW
Power Supply	220V 50Hz	Curtain Thickness	0.8mm
Opening Speed	0.6m~1.5m/s	Operating Temperature	- 30° C ~ +50° C

Structure

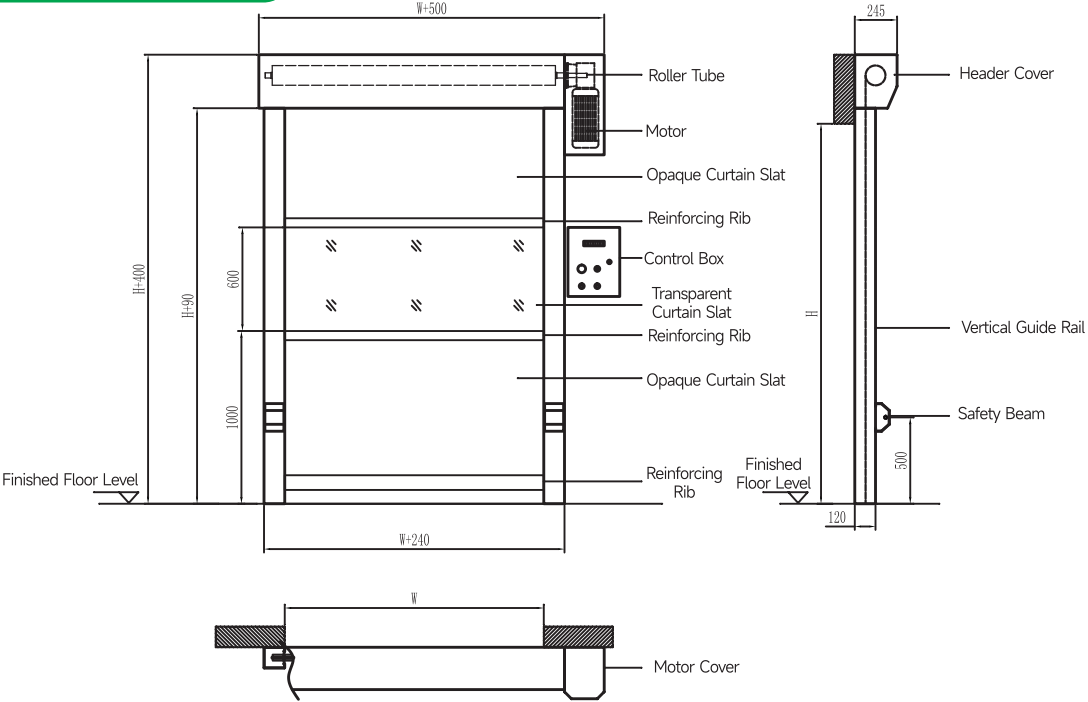

OTHER STRUCTURE DIAGRAMS

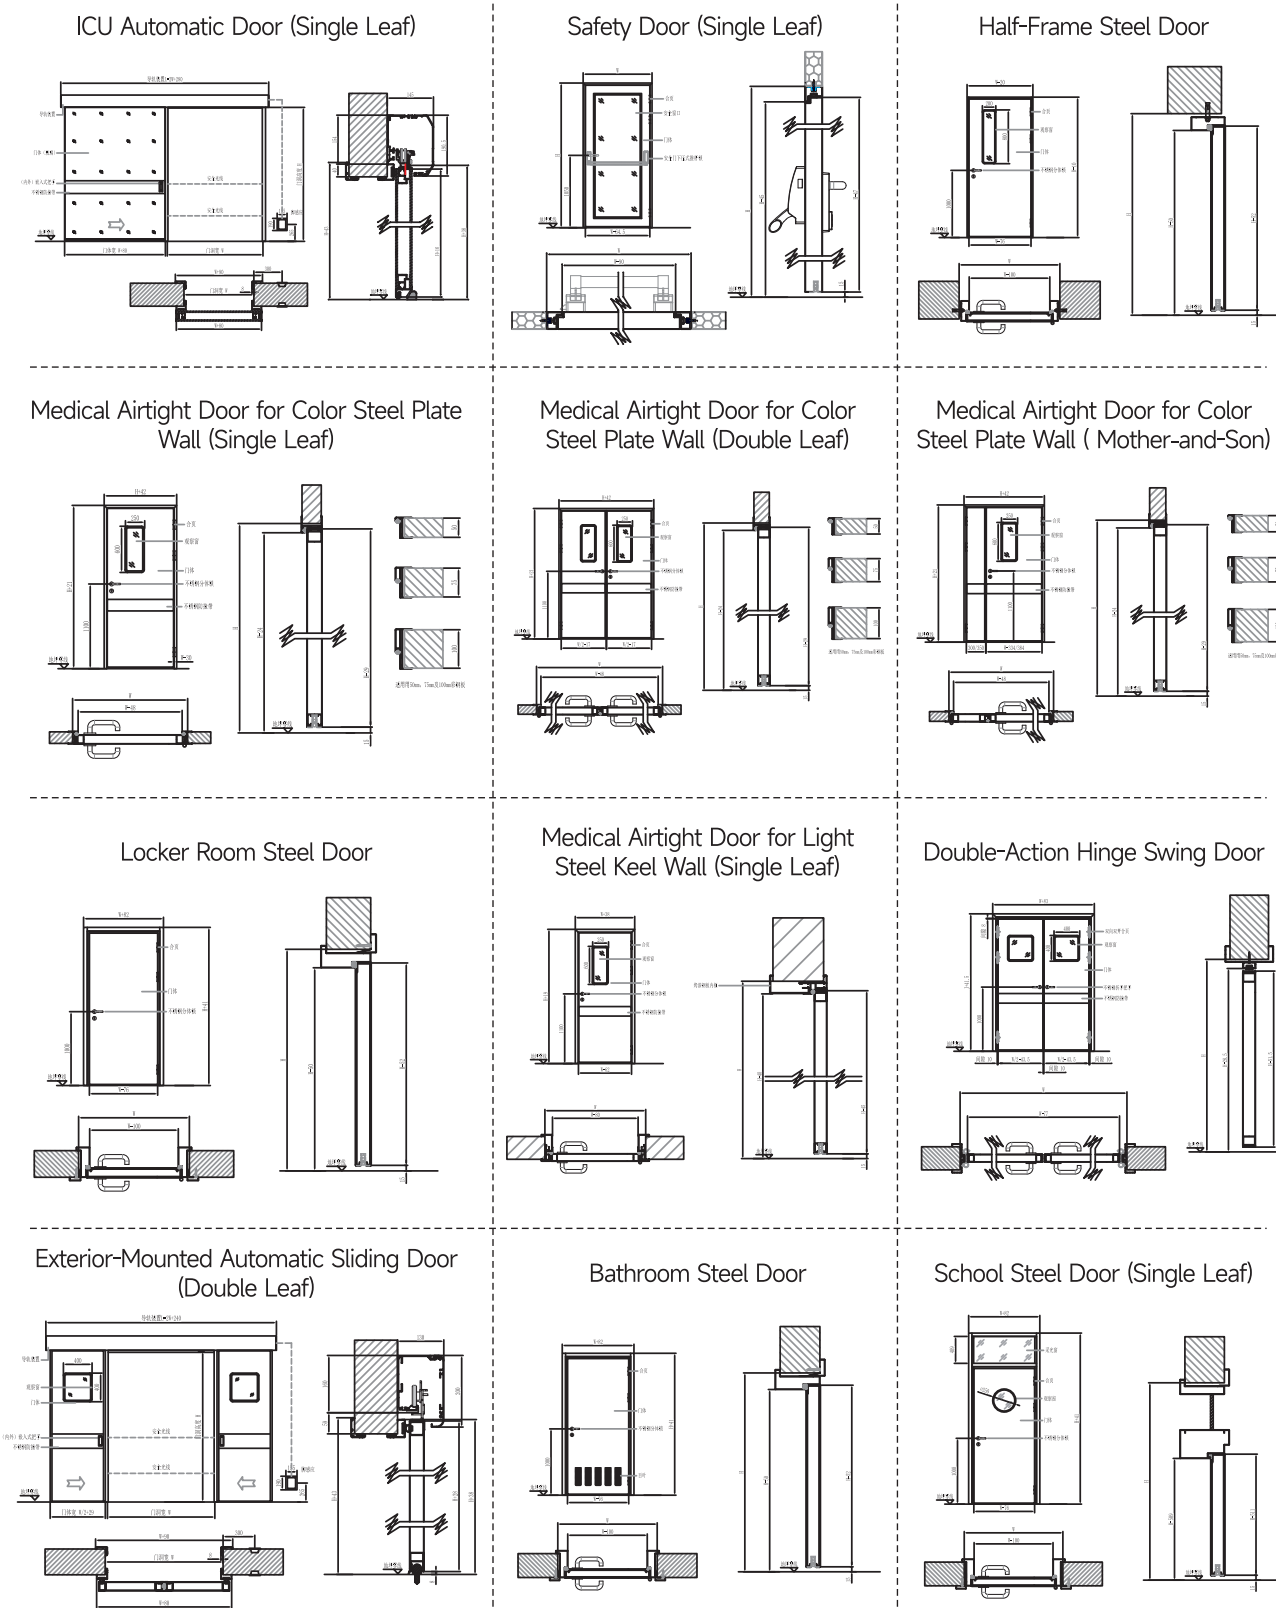

STANDARD COLOR CHART



OUR PARTNERS

- OEM&ODM services available.
- Our experienced team is ready to discuss your project requirements and deliver solutions you can trust.
- Partner logos are for reference only. Not all partners are listed due to space limitations. Contact us for details.



Peking University Shenzhen Hospital	Jiangmen Wuyi Hospital of Traditional Chinese Medicine
The Seventh Affiliated Hospital of Sun Yat-sen University	Jiangmen Xinhui People's Hospital
The Sixth Affiliated Hospital of Sun Yat-sen University	Jiangmen Chen Jinglun Hospital
The First Affiliated Hospital of Sun Yat-sen University Nansha Hospital	Guangdong Qingyuan Hospital of Traditional Chinese Medicine
The First Affiliated Hospital of Sun Yat-sen University Shenzhen Hospital	Guangzhou Liwan District People's Hospital
The Fifth Affiliated Hospital of Sun Yat-sen University	Guangzhou Guang'an Hospital
The University of Hong Kong Shenzhen Hospital	Guangzhou Tonghe Hospital
Shenzhen Futian Maternal and Child Health Hospital	Guangzhou Zengcheng Maternal and Child Health Hospital
Shenzhen Futian Women and Children's Hospital	Guangdong Meixian People's Hospital
Shenzhen Futian Hospital of Traditional Chinese Medicine	Foshan Third People's Hospital
Shenzhen Futian Ciji Hospital	Huizhou Zhongkai People's Hospital
Shenzhen Yantian People's Hospital	Guangdong Jieyang Lancheng People's Hospital
Shenzhen Guangming Hospital of Traditional Chinese Medicine	Zhuhai Qiaoli Hospital of Traditional Chinese Medicine
Shenzhen Guangming Central Hospital	Zhuhai Fifth People's Hospital
Shenzhen Children's Hospital	Jieyang Keji Hospital
Shenzhen Second Children's Hospital	Dongguan Guangming Eye Hospital
Shenzhen Pingdi People's Hospital	Guangdong Eye Hospital
Shenzhen Songgang People's Hospital	Fogang Hospital of Traditional Chinese Medicine
Shenzhen Chronic Disease Hospital	Conghua Hospital of Traditional Chinese Medicine
The Third People's Hospital of Shenzhen	Shantou Chaoyang People's Hospital
Shenzhen Xili People's Hospital	Yunfu People's Hospital
The Sixth People's Hospital of Shenzhen	Foshan Nanhai District People's Hospital
Shenzhen Bao'an Central Hospital	Guangdong Meixian Maternal and Child Health Hospital
Shenzhen Xin'an Hospital	Huizhou Sixth People's Hospital
Shenzhen Pengcheng Hospital	Guangdong Yuebei People's Hospital
Shenzhen Shiyan People's Hospital	Guangdong Lianjiang Hospital of Traditional Chinese Medicine
Shenzhen Shajing People's Hospital	Guangdong Lianjiang Qingping Town Central Hospital
Shenzhen Occupational Disease Prevention and Control Hospital	Guangdong Zhaoqing Fengkai People's Hospital
Shenzhen Longhua Central Hospital	Guangdong Lufeng Second People's Hospital
Shenzhen Bao'an Hospital of Traditional Chinese Medicine	Guangdong Leizhou People's Hospital
Shenzhen Pingshan Sammi Central Hospital	Xinxing People's Hospital
Shenzhen Longhua New District Brain Hospital	Guangdong Leizhou Fourth People's Hospital
Shenzhen Dapeng New District Dapeng People's Hospital	Guangdong Maoming Xinyi Second People's Hospital
Shaoguan Nanxiong Hospital of Traditional Chinese Medicine	The 74th Group Army Hospital
Shaoguan Shixing County People's Hospital	Sichuan Lushan County People's Hospital
Taishan Maternal and Child Health Hospital	Sichuan Ya'an People's Hospital
Zhuhai Chronic Disease Hospital	Sichuan Dazhu County People's Hospital
Mozambique Hospital	Iraq Hospital

Not all partners are listed due to space limitations. Thank you for your trust.